




Internal Cam Cleat 359°

<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE FLAG COMPANY, INC. ANY REPRODUCTION IN PART OR IN WHOLE WITHOUT WRITTEN PERMISSION OF THE FLAG COMPANY, INC. IS PROHIBITED.</small>			
THE FLAG COMPANY, INC.			
<small>DRAWN</small> JPW	<small>1-27-04</small>	THE FLAG COMPANY, INC. FLAGPOLE BEACON U.S. Patent #7,275,495	
<small>CHECKED</small> DOW	<small>1-27-04</small>		
<small>DESIGNER</small> DOW	<small>1-27-04</small>		
<small>APPROVED</small> MIKE L.	<small>1-27-04</small>	<small>SIZE</small> A	<small>DRAWING NUMBER</small> CAM-359
<small>SCALE</small> None	<small>REV</small> -	<small>SHEET</small> 1 of 1	

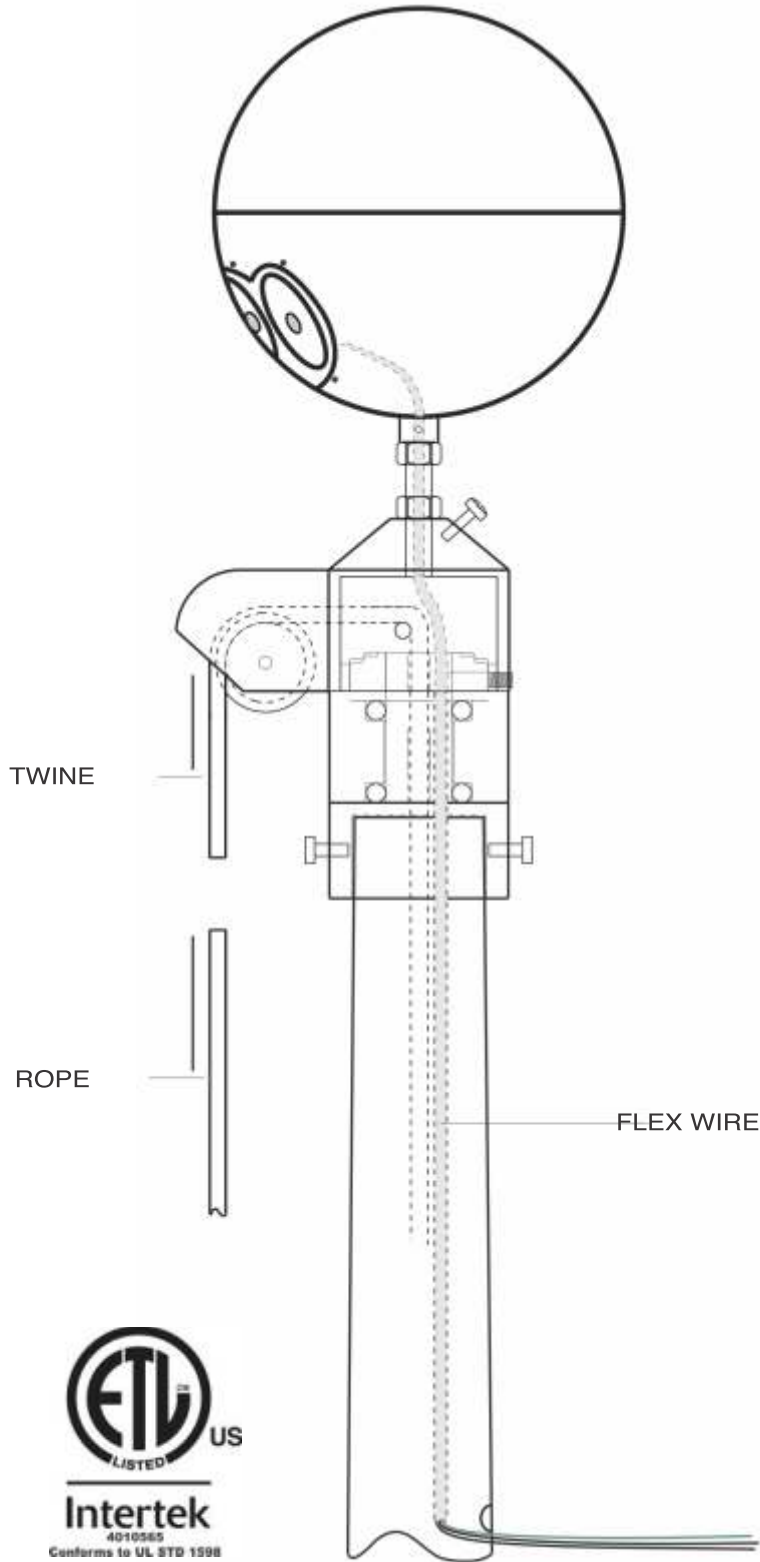

<p>ROPE INSTRUCTIONS</p> <ol style="list-style-type: none"> 1. DO NOT REMOVE TWINE BEFORE SECURING TO ROPE 2. SECURE ROPE TO END OF TWINE 3. UNTIE TWINE AND PULL ROPE THROUGH NEW CAM 4. SECURE BEACON ON POLE 	<p>Pole Adapter</p>
--	---------------------

Customer P.O. # _____	Date: _____	Customer Name: _____
Factory Order #: _____	Quantity: _____	Project Name: _____
Pole Sections #: _____	Finish: _____	Architect Name: _____



Cam Installation Instructions

Installation should be performed by a qualified electrician. All wiring must comply with state and local codes.

*** Retro Fit Beacon - Skip step 2**

*** New Flagpole Installation - Start at step 2**

1. Drill 11/16" dia. hole in flagpole at ground level. (Flash collar will hide wire.)
2. Dig a 3" or 4" trench from ground sleeve to power supply, and then drill a 11/16" hole to line up with the 3" or 4" trench.
3. Thread rope through beacon, drop rope and wire down center of pole.
4. Attach beacon to flagpole (untwist any tangled wires).
5. Using solid copper wire, make a small hook on one end that will pass through 11/16" hole in the flagpole.
6. Insert hook into flagpole & pull wire through, leaving some slack. Run wire through grommet and secure to flagpole.
7. Erect flagpole following enclosed installation instructions.
8. Install necessary conduit into foundation sleeve. (Check local codes.)

Bulb Changing Instructions

1. Disconnect power from Flagpole Beacon.
2. Loosen retainer clips (3) using a Phillips head screwdriver while holding bulbs in place.
3. Remove bulbs from sockets. (Caution: glass can break, causing injury.)
4. Carefully insert new bulbs, making sure not to apply too much pressure.
5. Tighten clips back into place evenly.

NOTE: It is strongly recommended that both bulbs be replaced at the same time.