



www.flagpolewarehouse.com
770.974.0507

Red Obstruction Lighting Standards (FAA Style A)


Day Protection = Aviation Orange/White Paint
Night Protection = 2,000cd Red Beacon and Sidelights



L-864 Flashing Beacon



L-810 Obstruction Light

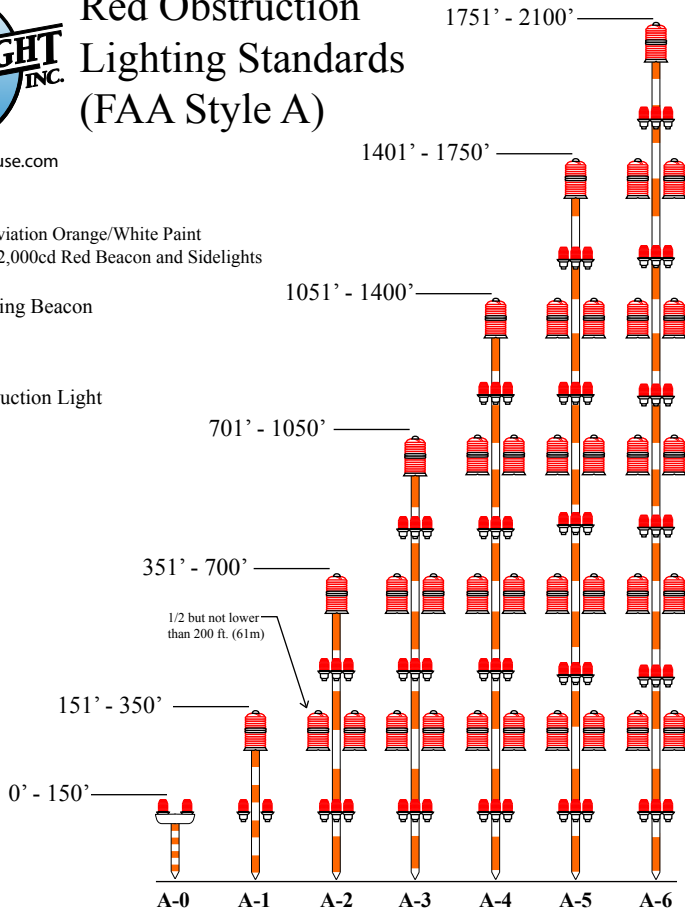

Note:

1. The chart above illustrates the requirements for standard lighting of towers and supporting structures in accordance with FAA Advisory Circular 70/7460-1; Chapters 3, 4, 5, and 12.
2. The overall height of the structure including all appurtenances such as rods, antennas, obstruction lights, etc., determines the number of light levels.
3. The red obstruction lighting system is composed of flashing omnidirectional beacons (L-864) and/or steady-burning lights (L-810). When one or more levels is comprised of flashing beacon lighting, the lights should flash simultaneously.