

Model ECXA25



www.flagpolewarehouse.com

5" - 14 gauge spun aluminum ball
gold anodized.

Single sheave, cast aluminum
revolving truck (see detail).

1 Set of halyard, #10 poly

2 Bronze swivel
snaps with covers

1 - 9" Cast Aluminum Cleats

Aluminum flash collar

3000 PSI concrete

Hardwood wedges
(supplied by others)

Dry sand tightly tamped
after aligning pole

Foundation sleeve -16 ga
hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate
welded to grounding spike

Cleat height: 5'-0"

Foundation: 3'-6"

3'-0"

6"

12"


24"

Tapered portion: 11'-0"

Straight portion: 16'-0"

Pole length: 27'-0"

Overall length: 28'-0"

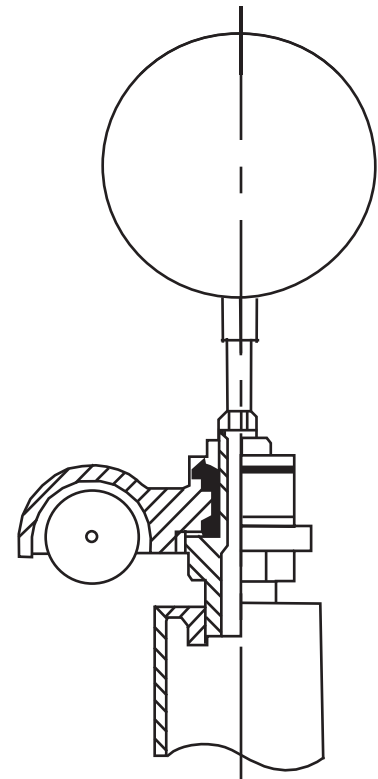


Truck Detail

Cast aluminum construction
2" OD cast nylon pulley
on a 1/4" stainless steel axle
Self-lubricating ball bearings
1-1/4" NPT bottom thread
1/2-13 NC thread for ornament

All shafts with overall
length of more than
38'-6" are shipped in
two sections.

Each section matched
marked for field assembly.
Exposed portion of jam
sleeve must be **well
lubricated** prior to
assembly.

1-1/2" maximum shop
gap allowed for field
fitting (ram for tight joint)



| | | | | |
|-------------|---|------------------------|-----------------------|-----------|
| Project: | Ground set tapered aluminum flagpole: ALLOY: 6063T6 | | EDER FLAG | Date: |
| Location: | Exposed height: 25'-0" | Overall height: 28'-0" | MANUFACTURING COMPANY | Revision: |
| Architect: | Ship in 1 section | Butt diameter: 5" | 1000 W. Rawson Avenue | |
| Contractor: | Top diameter: 3" | Wall thickness: .156" | Oak Creek, WI 53154 | |
| Customer: | Finish: 100 grit polish | | | Job: |