

# ILLUMINATOR




## Model ILH35 HURRICANE SERIES

Max unflagged wind speed: 255 mph

Max flagged wind speed: 150 mph

**FLAGPOLE**  
WAREHOUSE

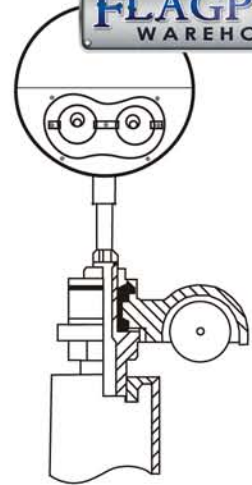

### Truck Details

Aluminum body

Stainless steel ball bearings

Aluminum sheave

Cast aluminum spindle

**35' Pole Height**

Max flag size: 6' x 10'


Cleat Cover  
(optional)





9" Cleat



Shoe base options



Approximate flag pole height

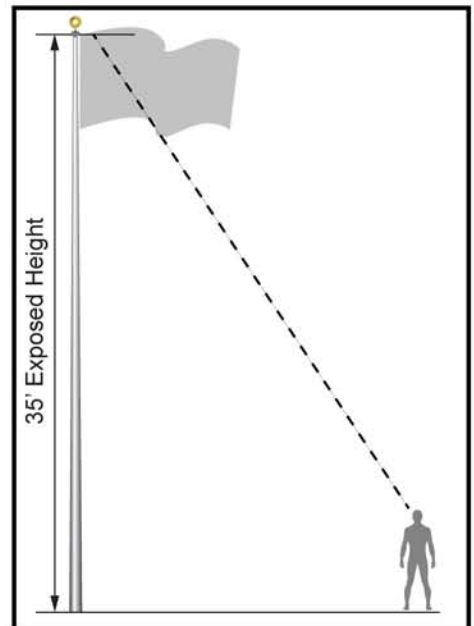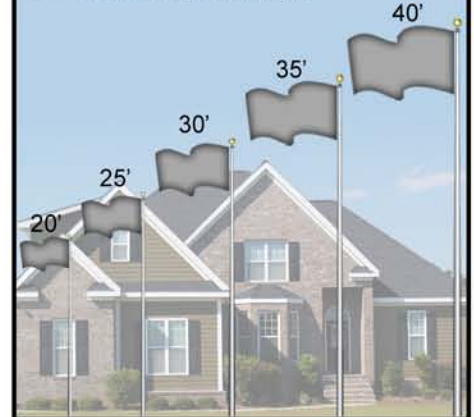


**Intertek**

4010565  
Conforms to UL STD 1598



Project:	Ground set tapered aluminium flagpole: ALLOY 6063T6	Flagpole Warehouse	Date:
Location:	Exposed Height: 35' - 0"	Overall Height: 38' - 6"	Revision:
Architect:	Butt diameter: 8"	Finish: 100 grit polish	
Contractor:	Top diameter: 3-1/2"	www.flagpolewarehouse.com	
Customer:	Wall Thickness: .250"	Ship in: 2 Section	Job:

## Model ILH35 35' Pole Height

Pole Height	A	B	C	D	E	F	G
20'	3' - 0"	3' - 6"	6"	12"	6"	12"	24"
25'	3' - 0"	3' - 6"	6"	12"	8"	16"	30"
30'	3' - 0"	3' - 6"	6"	12"	8"	16"	30"
35'	3' - 6"	4' - 0"	6"	12"	8"	16"	35"
40'	4' - 0"	4' - 6"	6"	12"	9"	18"	48"
45'	4' - 0"	4' - 6"	6"	12"	9"	18"	48"
50'	5' - 0"	5' - 6"	6"	12"	10"	20"	60"
60'	6' - 0"	6' - 10"	10"	14"	12"	24"	72"
70'	7' - 0"	8' - 0"	12"	12"	12"	24"	72"
80'	8' - 0"	9' - 0"	12"	12"	12"	24"	72"

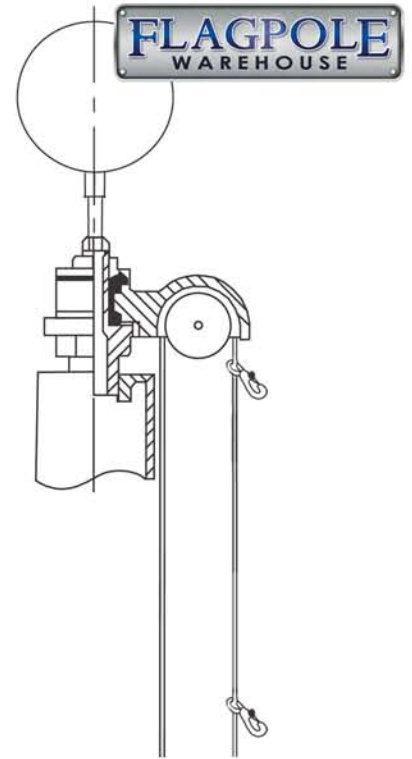

Securing your flag  
 Step 1: Slip a loop through the eye of the snap  
 Step 2: Put the loop over the snap  
 Step 3: Draw Tight

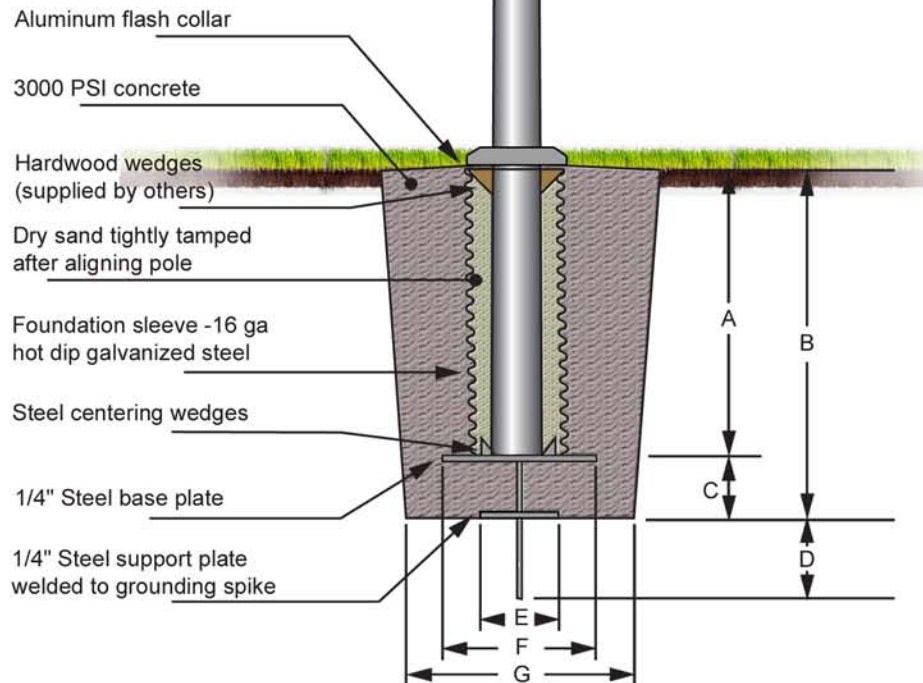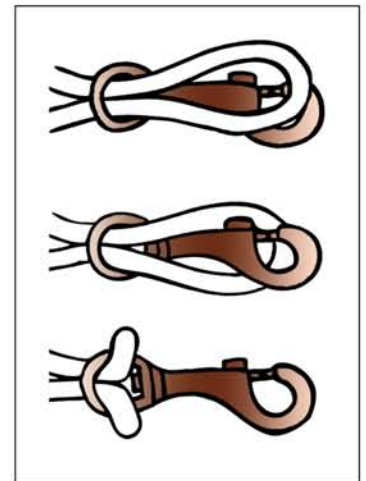


Project:	Ground set tapered aluminium flagpole: ALLOY 6063T6		Flagpole Warehouse	Date:
Location:	Exposed Height: 35' - 0"	Overall Height: 38' - 6"	3600 Cantrell Industrial CT.	Revision:
Architect:	Butt diameter: 8"	Finish: 100 grit polish	Acworth, GA 30101	
Contractor:	Top diameter: 3-1/2"		www.flagpolewarehouse.com	
Customer:	Wall Thickness: .250"	Ship in: 2 Section	1-800-962-0956	Job:



## COMMERCIAL FLAGPOLE LIGHTING FIXTURE


Its patented design lights the flag only and follows the flag as the wind blows it around the flagpole.

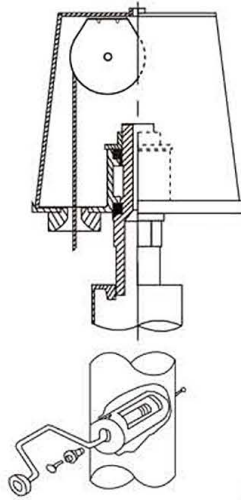

### Internal Halyard Beacon

#### Features include:


- Revolving Internal Halyard Truck, 359 degrees
- Wire kit 10' past height of pole
- LED Bulb
- Utilizes a winch system to pull up and down the halyard
- Transformer inside fixture. 120V Supply / 12V Output.

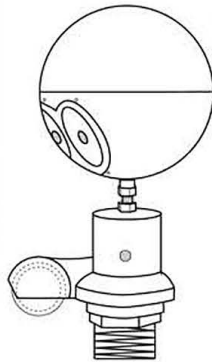

### External Halyard Beacon Included

#### Features include:

- Wiring, length of pole +10 feet
- 8" Flagpole Beacon
- Revolving 359 degrees
- LED Bulb
- Suitable for 3.5" top diameter poles
- Transformer inside fixture. 120V Supply / 12V Output.

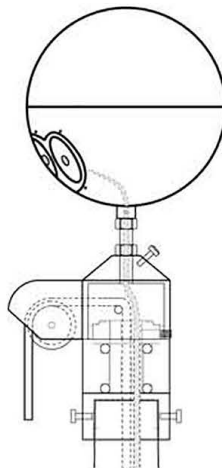

### Internal Halyard CAM System Beacon

#### Features include:

- Wire kit 10' past height of pole
- All Cam units require a pole top adapter
- 8" Flagpole Beacon
- Revolving 359 degrees
- LED Bulb
- Suitable for 20' to 40' poles
- Transformer inside fixture. 120V Supply / 12V Output.




**Intertek**

4010565  
Conforms to UL STD 1598

Project:		Flagpole Warehouse	Date:
Location:		3600 Cantrell Industrial CT.	Revision:
Architect:		Acworth, GA 30101	
Contractor:		www.flagpolewarehouse.com	
Customer:		1-800-962-0956	Job:

## Solar Options

**FLAGPOLE**  
WAREHOUSE

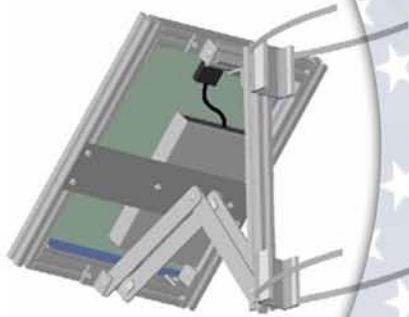

### Solar Power Complete Package

**Includes:**

- Solar Collector
- Battery
- Pole mount
- 20, 30 or 40 watt collector
- Custom designs available



### Solar Collector

**Includes:**

- Collector for solar Flagpole Beacon
- 20, 30 or 40 watt
- Custom designs available



### Solar Battery Pack

**Includes:**

- Battery pack for solar Flagpole Beacon
- 9, 12 or 15 Amp available
- 9 Amp - 12 hour run time
- 12 Amp - 24 hour run time
- 15 Amp - 30 hour run time
- Installs behind solar collector
- Easy access to on / off switch



### Solar Pole Mount

**Includes:**

- Mount for 20, 30 and 40 watt solar collector
- Easy to install
- Designs may vary



**Intertek**

4010565  
Conforms to UL STD 1598

Project:		Flagpole Warehouse	Date:
Location:		3600 Cantrell Industrial CT.	Revision:
Architect:		Acworth, GA 30101	
Contractor:		www.flagpolewarehouse.com	
Customer:		1-800-962-0956	Job: