

# Model ECX30 TD

FLAGPOLE  
WAREHOUSE

5" - 14 gauge spun aluminum ball  
gold anodized

Single sheave truck, cast aluminum  
revolving, non-fouling type

2 Bronze swivel snaps with covers  
per halyard

1 Set of halyard: #10 poly

1 - 9" Cast aluminum cleat

Cast aluminum hinge base  
(see detail)

3000 PSI concrete

(4) 3/4" x 24" anchor bolts

Tapered portion: 17'-3"


Exposed height: 30'-0"

Straight portion: 15'-9"

Cleat height: 5'-0"


Foundation: 4'-0"

30"

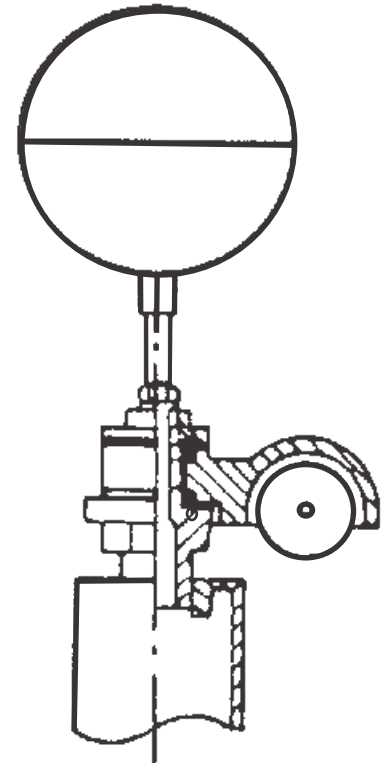

**Truck Detail**

Aluminum body  
Stainless steel ball bearings  
Aluminum sheave  
Cast aluminum spindle



**Tilting Shoe Base**

Hinged cast aluminum  
Anchor base A356-T6 pivot  
on a 3/4" solid aluminum pivot  
Rod base fastened with  
(3) 1/2" - 13x3" stainless steel  
allen head screws

Project:	Ground set tapered aluminum flagpole	Flagpole Warehouse	Date:
Location:	Overall height: 30'-0"		Revision:
Architect:	Ship in 1 section	Butt diameter: 5"	
Contractor:	Top diameter: 3"	Wall thickness: .125"	
Customer:	Finish: 100 grit polish		Job: